








The EVOline Port Push fits virtually flush with the work surface.

By using the Push-To-Open function, the housing is released and appears above the work surface, enabling an easy pull up to connect power and data cables. With a light press of a finger, it retracts with connected leads. Slide dampers ensure a soft closing. The patented rocking cover enables a space-saving cable routing through the desk.

The Port Push modules can be assembled to customer's needs. The interchangeable data and multimedia modules allow greater flexibility, enabling future proof technology with ever changing usage requirements.



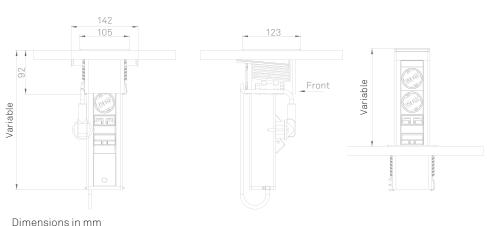

Housing Aluminium, anodised Inlay for Cover Stainless steel and Collar Glass Installation Flush-mounted Surface thickness 10 - 50 mm Interchangeable 25 mm modules Configurable yes Retractable yes (connected leads)



A selection of interchangeable modules can be found on page 122.





Description Picture Specifications Order Number Price¹

EVOline Port Push

Aluminium housing silver anodized.

 $2\times sockets, VDE\text{-}compliant, 60°, 16 A, contact-protected.$

Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0300

€ 137.91

EVOline Port Push

Aluminium housing silver anodised. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected Fixed supply cable 3.0 m with angled plug.



Cover and collar in black plastic with brushed stainless steel inlay 1593 1100 0400

€ 146.83

Cover options



Brushed Stainless Steel



Black Glass (gloss)



White Glass (frosted)

Description	Picture	Specifications	Order Number	Price ¹

EVOline Port Push Cuisine

Aluminium housing, silver anodised.

 $3\times$ sockets, VDE-compliant, 60°, 16 A, contact-protected.

Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0100 € 127.15

EVOline Port Push Cuisine Charger

Aluminium housing, silver anodised. 1 × USB-Charger Type A, 5V / 1A 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected.

Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0200 € 179.56

Description	Picture	Specifications	Order Number	Price ¹
EVOline Port Push DATA		Cover and collar	1593 1100 0500	€ 216.51
A1		in black plastic with bro		

Aluminium housing, silver anodised.

3 × sockets, VDE-compliant, 60°, 16 A, contact-protected.

 $2\times modular$ couplings CAT 6 shielded, 1:1 interconnected.

Fixed supply cable 3.0 m with angled plug.



hed stainless steel inlay

EVOline Port Push CHARGER

Aluminium housing, silver anodised. $2 \times USBCharger Typ A, 5V / 1A$ $2 \times \text{sockets}$, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled



Cover and collar in black plastic with brushed stainless steel inlay

1593 1100 0600 €208.01

Configure your individual EVOline Port Push using the EVOline Modular System

See page 5 for instructions

plug.

Configurable Basic Housing **EVOline Port Push**

Aluminium housing, silver anodised.



Cover and collar in black plastic with brus- hed stainless steel inlay	9332 0040 0000	€ 122.57
Cover and collar in black plastic with frosted white glass inlay	9332 1020 0000	€ 200.12
Cover and collar in black plastic with glossy black glass inlay.	9332 1030 0000	€ 200.12